


Movable Player Bench Specifications by Seatup TR Ltd.



1. All materials and techniques used in production will be made in accordance with European standards.
2. It should be able to protect the players against foreign materials thrown from the stands, be durable, robust and long-lasting.
3. It should be bad weather resistant and waterproof.
4. Metal legs will be manufactured from box profile bending.
5. Box profiles are at least 2.5 mm thickness and will be joined by gas metal arc welding technique.
6. Special metal feet will be positioned as 1 in 4 meters.
7. The shelter will not be floor mounted. It will be movable with 9 wheels with a minimum diameter of 100 mm.
8. The seat platform will be manufactured with wheels and will not be mounted on the floor.
9. The metal skeleton will be covered with min. 5 mm thick unbreakable solid material.

10. Unbreakable solid material will be mounted on the metal skeleton with special aluminum laths. There will be a waterproof plastic gasket at the joints.
11. Horizontal profiles dimensions will be min. 70x40x2 mm.
12. The pipe used in the front will be min. 76x2 mm in size.
13. There will be no swelling, roughness, discharge, scratches and color tone differences on the painted surfaces.
14. Metal surfaces will be painted after mechanical and chemical cleaning (min 60 mic.)
15. It will be produced as 2 pieces of 23 people (12,40 meters), 4 pieces of 4 people (2.9 meters).

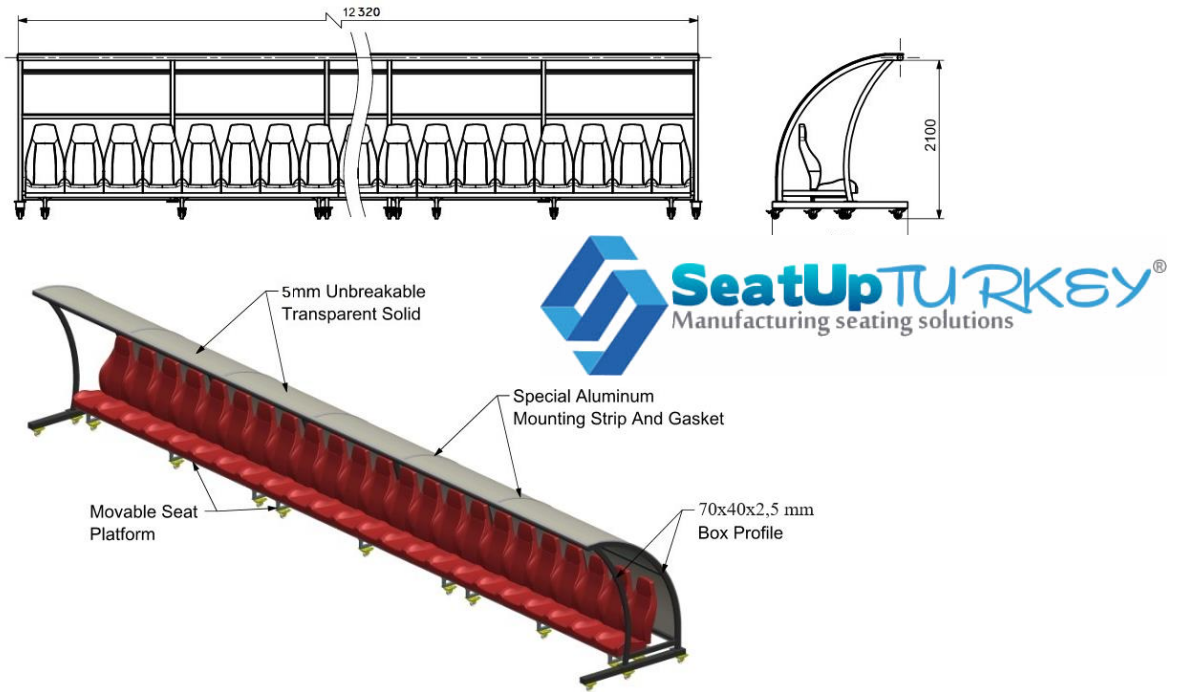